

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	50	Hz
Speed	n	935	RPM
Power consumption	P _e	430	W
Nominal current	I _{nom}	2	A
Maximum current	I _{max}	2.9	A
Cos φ		0.93	
Capacitor		12/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	64	db(A)
Sound pressure level (7 m)	L _p (calc.)	53	db(A)
Weight		28.8	kg
Packing dimensions		825x825x395	mm

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0 Pa	14650 m ³ /h
------	-------------------------




Please note: Picture may deviate from original product

Approval(s)




Wiring diagram
C1 - 1 Phase - Standard - CCW

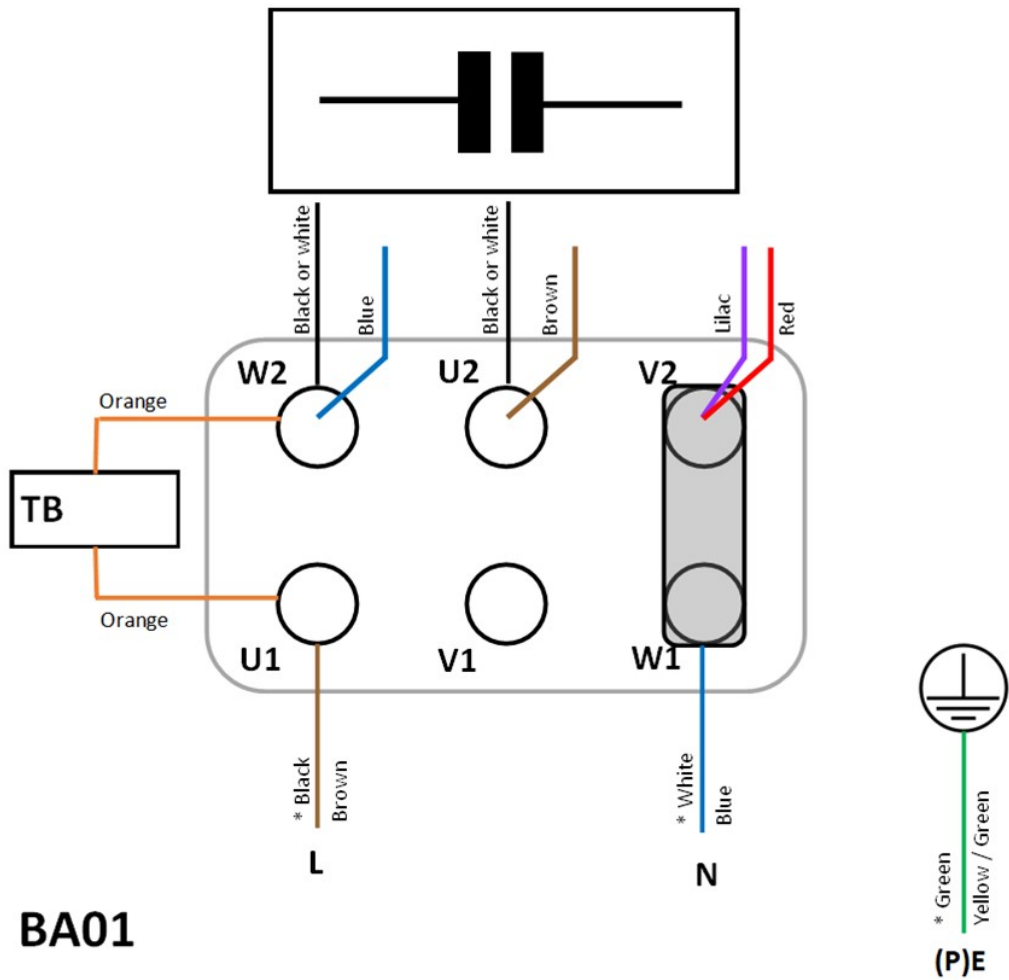

BA01

Dimensions

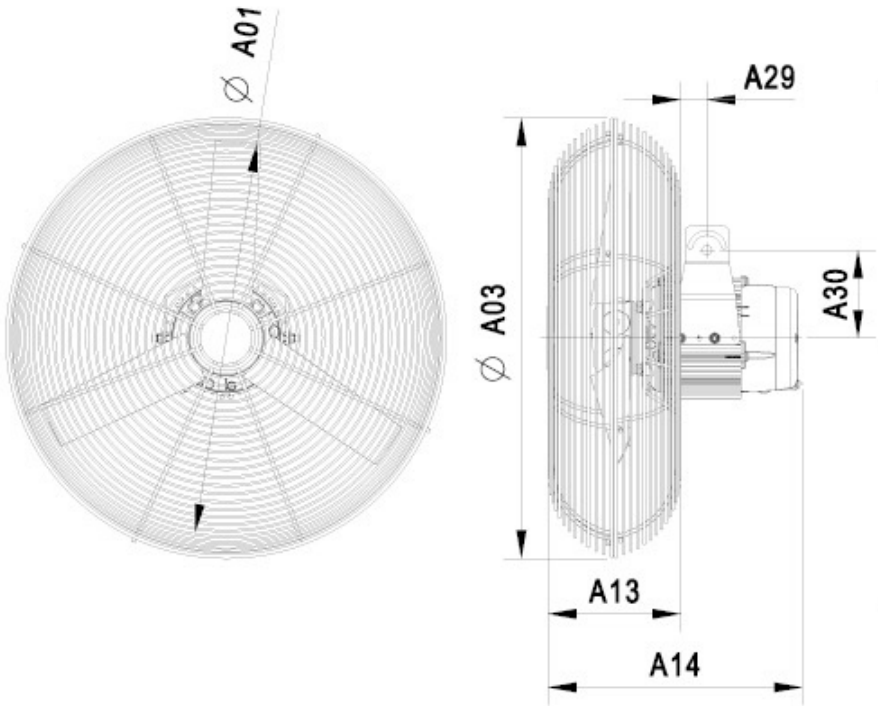

A01:	709 mm
A03:	830 mm
A13:	230 mm
A14:	413 mm
A29:	29 mm
A30:	115 mm

